



AL20NE

Vulcanizers for Rubber Conveyor Belts > Portable presses > Water-cooled

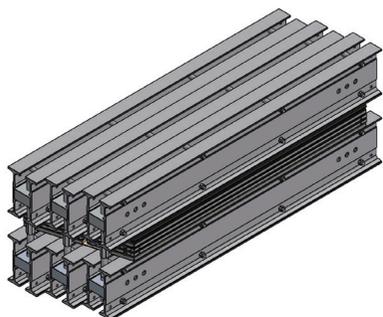

Pressure	7 Bar (100PSI) / 14 Bar (200PSI)
Heating	Heating Elements 185°C Max.
Cooling	Water
Belt width	Up to 3200
Angle	16° - 22° - 90°

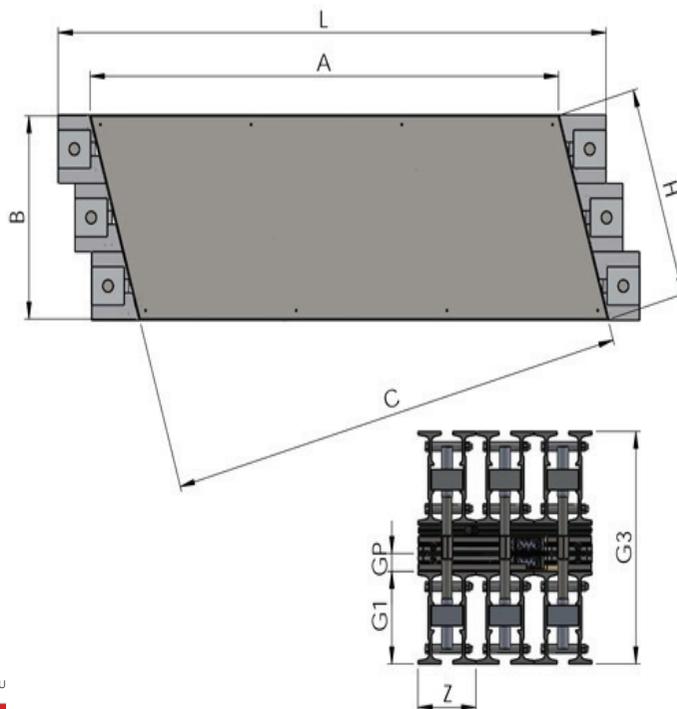

Weights and dimensions correspond to the 16°. Total weight includes pressu

7 Bar (100PSI)	Belt	Z	Set of beams	G1	GP	G3	A	B	C	H	L	Bottom beam weight	Top beam weight	Platen weight	Total weight
Model	mm	mm		mm	mm	mm	mm	mm	mm	mm	mm	Kg	Kg	Kg	Kg
AL20NE 650x400	650	200	2	200	58	553	845	400	812	416	1105	23	23	26	186
AL20NE 800x400	800	200	2	200	58	553	1000	400	961	416	1260	26	26	29	206
AL20NE 1000x400	1000	200	2	200	58	553	1205	400	1158	416	1465	30	30	35	236
AL20NE 1200x400	1200	200	2	200	58	553	1415	400	1360	416	1675	35	35	41	269
AL20NE 1400x400	1400	200	2	200	58	553	1620	400	1557	416	1890	39	39	47	301
AL20NE 1600x400	1600	200	2	200	58	553	1830	400	1759	416	2100	43	43	53	332
AL20NE 1800x400	1800	200	2	270	58	693	2040	400	1960	416	2320	47	47	57	367
AL20NE 650x600	650	200	3	200	58	553	845	600	812	624	1105	23	23	33	261
AL20NE 800x600	800	200	3	200	58	553	1000	600	961	624	1260	26	26	43	306
AL20NE 1000x600	1000	200	3	200	58	553	1205	600	1158	624	1465	30	30	52	360
AL20NE 1200x600	1200	200	3	200	58	553	1415	600	1360	624	1675	35	35	61	399
AL20NE 1400x600	1400	200	3	200	58	553	1620	600	1557	624	1890	39	39	70	447
AL20NE 1600x600	1600	200	3	200	58	553	1830	600	1759	624	2100	43	43	79	494
AL20NE 1800x600	1800	200	3	270	58	693	2040	600	1960	624	2320	60	60	86	547
AL20NE 650x800	650	200	4	200	58	553	845	800	812	832	1105	23	23	49	357
AL20NE 800x800	800	200	4	200	58	553	1000	800	961	832	1260	26	26	58	393
AL20NE 1000x800	1000	200	4	200	58	553	1205	800	1158	832	1465	30	30	75	467
AL20NE 1200x800	1200	200	4	200	58	553	1415	800	1360	832	1675	35	35	81	529
AL20NE 1400x800	1400	200	4	200	58	553	1620	800	1557	832	1890	39	39	93	593
AL20NE 1600x800	1600	200	4	200	58	553	1830	800	1759	832	2100	43	43	105	654
AL20NE 1800x800	1800	200	4	270	58	693	2040	800	1960	832	2320	60	60	117	835

The technical data shown are subject to change without notice.

AL2ONE

Vulcanizers for Rubber Conveyor Belts > Portable presses > Water-cooled

7 Bar (100PSI)	Belt	Z	Set of beams	G1	GP	G3	A	B	C	H	L	Bottom beam weight	Top beam weight	Platen weight	Total weight
Model	mm	mm		mm	mm	mm	mm	mm	mm	mm	mm	Kg	Kg	Kg	Kg
AL2ONE 650x1000	650	200	5	200	58	553	845	1000	812	1040	1105	23	23	62	436
AL2ONE 800x1000	800	200	5	200	58	553	1000	1000	961	1040	1260	26	26	73	503
AL2ONE 1000x1000	1000	200	5	200	58	553	1205	1000	1158	1040	1465	30	30	87	581
AL2ONE 1200x1000	1200	200	5	200	58	553	1415	1000	1360	1040	1675	35	35	102	658
AL2ONE 1400x1000	1400	200	5	200	58	553	1620	1000	1557	1040	1890	39	39	116	738
AL2ONE 1600x1000	1600	200	5	200	58	553	1830	1000	1759	1040	2100	43	43	131	814
AL2ONE 650x1200	650	200	6	200	58	553	845	1000	812	1248	1105	23	23	75	533
AL2ONE 800x1200	800	200	6	200	58	553	1000	1200	961	1248	1260	26	26	94	616
AL2ONE 1000x1200	1000	200	6	200	58	553	1205	1200	1158	1248	1465	30	30	104	696
AL2ONE 1200x1200	1200	200	6	200	58	553	1415	1200	1360	1248	1675	35	35	123	792
AL2ONE 1400x1200	1400	200	6	200	58	553	1620	1200	1557	1248	1890	39	39	139	882
AL2ONE 1600x1200	1600	200	6	200	58	553	1830	1200	1759	1248	2100	43	43	157	976

14 Bar (200PSI)	Belt	Z	Set of beams	G1	GP	G3	A	B	C	H	L	Bottom beam weight	Top beam weight	Platen weight	Total weight
Model	mm	mm		mm	mm	mm	mm	mm	mm	mm	mm	Kg	Kg	Kg	Kg
AL2ONE 650x400	650	200	2	200	58	553	845	400	812	416	1105	23	23	26	186
AL2ONE 800x400	800	200	2	200	58	553	1000	400	961	416	1260	26	26	29	206
AL2ONE 1000x400	1000	200	2	200	58	553	1205	400	1158	416	1465	30	30	35	236
AL2ONE 1200x400	1200	200	2	200	58	553	1415	400	1360	416	1675	35	35	41	269
AL2ONE 1400x400	1400	200	2	270	58	693	1620	400	1557	416	1890	48	48	47	345
AL2ONE 1600x400	1600	200	2	270	58	693	1830	400	1759	416	2100	54	54	53	384
AL2ONE 1800x400	1800	200	2	330	58	813	2040	400	1960	416	2320	65	65	57	448
AL2ONE 650x600	650	200	3	200	58	553	845	600	812	624	1105	23	23	33	261
AL2ONE 800x600	800	200	3	200	58	553	1000	600	961	624	1260	26	26	43	306
AL2ONE 1000x600	1000	200	3	200	58	553	1205	600	1158	624	1465	30	30	52	350
AL2ONE 1200x600	1200	200	3	200	58	553	1415	600	1360	624	1675	35	35	61	399
AL2ONE 1400x600	1400	200	3	270	58	693	1620	600	1557	624	1890	48	48	70	514
AL2ONE 1600x600	1600	200	3	270	58	693	1830	600	1759	624	2100	54	54	79	571
AL2ONE 1800x600	1800	200	3	330	58	813	2040	600	1960	624	2320	65	65	86	668
AL2ONE 650x800	650	200	4	200	58	553	845	800	812	832	1105	23	23	49	357
AL2ONE 800x800	800	200	4	200	58	553	1000	800	961	832	1260	26	26	58	404
AL2ONE 1000x800	1000	200	4	200	58	553	1205	800	1158	832	1465	30	30	75	475
AL2ONE 1200x800	1200	200	4	200	58	553	1415	800	1360	832	1675	35	35	81	529
AL2ONE 1400x800	1400	200	4	270	58	693	1620	800	1557	832	1890	48	48	93	683
AL2ONE 1600x800	1600	200	4	270	58	693	1830	800	1759	832	2100	54	54	105	758
AL2ONE 1800x800	1800	200	4	330	58	813	2040	800	1960	832	2320	65	65	117	893
AL2ONE 650x1000	650	200	5	200	58	553	845	1000	812	1040	1105	23	23	62	436
AL2ONE 800x1000	800	200	5	200	58	553	1000	1000	961	1040	1260	26	26	73	503
AL2ONE 1000x1000	1000	200	5	200	58	553	1205	1000	1158	1040	1465	30	30	87	579
AL2ONE 1200x1000	1200	200	5	200	58	553	1415	1000	1360	1040	1675	35	35	102	653
AL2ONE 1400x1000	1400	200	5	270	58	693	1620	1000	1557	1040	1890	48	48	116	849

The technical data shown are subject to change without notice.

AL20NE

Vulcanizers for Rubber Conveyor Belts > Portable presses > Water-cooled

14 Bar (200PSI)	Belt	Z	Set of beams	G1	GP	G3	A	B	C	H	L	Bottom beam weight	Top beam weight	Platen weight	Total weight
Model	mm	mm		mm	mm	mm	mm	mm	mm	mm	mm	Kg	Kg	Kg	Kg
AL20NE 1600x1000	1600	200	5	270	58	693	1830	1000	1759	1040	2100	54	54	131	943
AL20NE 650x1200	650	200	6	200	58	553	845	1200	812	1248	1105	23	23	75	533
AL20NE 800x1200	800	200	6	200	58	553	1000	1200	961	1248	1260	26	26	94	616
AL20NE 1000x1200	1000	200	6	200	58	553	1205	1200	1158	1248	1465	30	30	104	694
AL20NE 1200x1200	1200	200	6	200	58	553	1415	1200	1360	1248	1675	35	35	123	792
AL20NE 1400x1200	1400	200	6	270	58	693	1620	1200	1557	1248	1890	48	48	139	1016
AL20NE 1600x1200	1600	200	6	270	58	693	1830	1200	1759	1248	2100	54	54	157	1131

The technical data shown are subject to change without notice.