



# E-KOMP

## Portable Presses



**E-KOMP**

Material	• Aluminium
Controllers	• Automatic process • Stepped dwell time • Manometer
Pressure	• Bottom airbag • Max. o.p. 7kg/cm <sup>2</sup> (100PSI)
Heating	• Silicone heating elements • Max.T. 185°C (365°F)
Cooling	• Water
Belt Width	• Up to 1600mm (60")
Length of platen	• 365, 522, 627 & 728mm (14", 21", 25" y 29")
Platen angle	• 16°, 22° or 90°

### Built-in controllers

No need to carry extra control unit. Simply plug it into electricity and it is ready to be used.

### Light weight and easy to handle

FONMAR has developed this vulcaniser considering the main needs of our customers:

*"A quick and easy-to-carry press."*



Manometer




### Up to 2 dwell levels

Specially for thicker belts, the stepped dwell time will improve the quality of your splices.

### Different electrical configurations available

230V 16A configuration with independent platens also available.

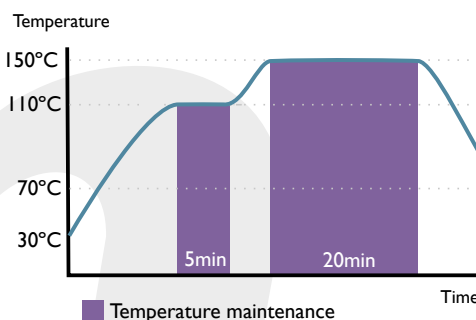

E-Komp 800x500 230V 16A with separate power connections.