


Dimensions and repairable tires

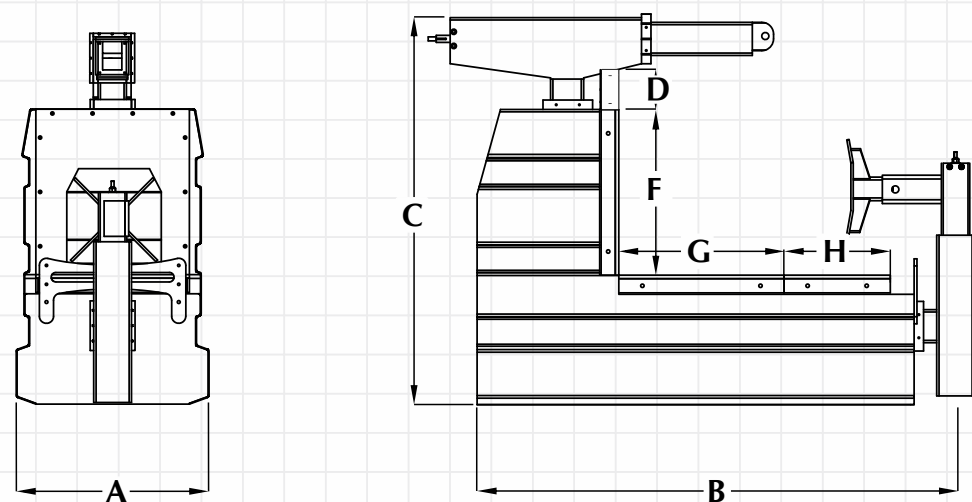

Model	Tyre type					
	Truck		Agricultural		OTR	
	From	To	From	To	From	To
ELITE R15	205/75 R17.5	495/45 R22.5	325/70 R18	520/85 R38	7.5 R15	23.5 R25
ELITE R30	205/75 R17.5	495/45 R22.5	325/70 R18	1050/50 R32	7.5 R15	24.00 R35
ELITE R51	-	-	540/65 R24	1050/50 R32	16.00 R25	30.00 R51
ELITE R63	-	-	520/85 R38	1050/50 R32	29.5 R29	59/80 R63

Model	A	B	C	D	F	G	H
ELITE R15	460	940-1440	820-1120	-	350	440	-
ELITE R30	640	1615-2215	1390-1888	-	500	650	-
ELITE R51	816	2065-2565	1560-2108	320	650	700	450
ELITE R63	1000	2850-3550	1960-2616	240	800	1100	550

All the dimensions are expressed in millimeters

For further information or specific details, contact us or your authorized distributor.



TYRE REPAIR

ELITE

Truck / Agricultural / OTR tyre repair vulcanizers

TYRE REPAIR

ELITE

Truck / Agricultural / OTR tyre repair vulcanizers

Presses for PVC/PU Conveyor Belts - Presses for Rubber Belts
Machines for Rubber Moulds - Machines for Tyre Repair
Machines for Transmission Belts



FONMAR S.A.
Poligono los Olivares
C/ Frailes, nº 16
23009 - JAÉN - SPAIN

+34 953 280 058
+34 953 280 012
sales@fonmar.com
www.fonmar.com

Latest generation vulcanisers

- ✓ Operation process completely automatised with a remote control.
- ✓ Interchangeable aluminium moulds, to reach a perfect adjustment and avoid deformations.
- ✓ Pressure system by means of pressure bags, reaching a homogenous pressure on the repair process.
- ✓ Possibility of bead repair with a special device.



Automatised adjustment



Easier adjustment of the tyre, thanks to the remote control, that can regulate the upper and front arms without effort.

Repairs in sidewall, shoulder and tread



Pressure system with squeezing sacks and plates.

Models



Eli e R15



Eli e R30



Eli e R51



Eli e R63

Autonomous digital control



Different heating areas are controlled from the displays:

Inner: through flexible heating pad

Outer: heating focuses in sidewall and tread.

Independent area in tread to optimize the power consumption depending on the tyre (in models ELITE R51 and ELITE R63).