



AL20NE

Vulcanizers for Rubber Conveyor Belts > Portable presses > Water-cooled

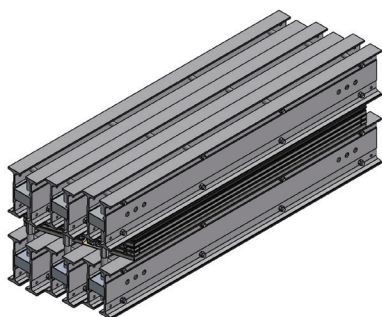

Material	Aluminium
Pressure	Pressure bag (Air/Water) 7 Bar (100PSI) / 14 Bar (200PSI)
Heating	Heating Elements 185°C Max.
Cooling	Water
Belt width	Up to 3200
Angle	16° - 22° - 90°

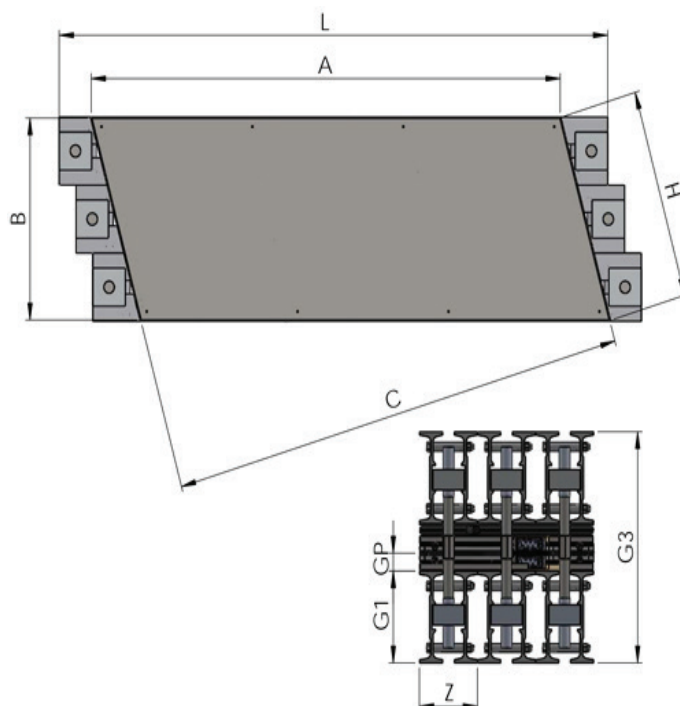

Weights and dimensions correspond to the 16°. Total weight includes pressure bag, protection plate, bolts and safety elements (pins, nuts and safety rails).

7 Bar (100PSI)	Belt	Z	Set of beams	G1	GP	G3	A	B	C	H	L	Bottom beam weight	Top beam weight	Platen weight	Total weight
Model	in	in		in	in	in	in	in	in	in	in	Lb	Lb	Lb	Lb
AL20NE 24x16	24	7.87	2	7.87	2.28	21.77	32.68	15.75	30.31	16.97	42.9	49.4	49.4	55	401
AL20NE 26x16	26	7.87	2	7.87	2.28	21.77	34.84	15.75	32.32	16.97	45.1	51.8	51.8	58	417
AL20NE 30x16	30	7.87	2	7.87	2.28	21.77	39.13	15.75	36.30	16.97	49.4	56.6	56.6	65	454
AL20NE 32x16	32	7.87	2	7.87	2.28	21.77	41.30	15.75	38.31	16.97	51.5	59.2	59.2	68	472
AL20NE 36x16	36	7.87	2	7.87	2.28	21.77	45.63	15.75	42.32	16.97	55.9	64.5	64.5	75	509
AL20NE 40x16	40	7.87	2	7.87	2.28	21.77	49.92	15.75	46.30	16.97	60.2	68.8	68.8	80	541
AL20NE 42x16	42	7.87	2	7.87	2.28	21.77	52.09	15.75	48.31	16.97	62.3	71.2	71.2	85	559
AL20NE 48x16	48	7.87	2	7.87	2.28	21.77	58.58	15.75	54.33	16.97	68.8	79.3	79.3	95	617
AL20NE 54x16	54	7.87	2	7.87	2.28	21.77	65.04	15.75	60.31	16.97	75.7	86.8	86.8	105	671
AL20NE 60x16	60	7.87	2	7.87	2.28	21.77	71.50	15.75	66.30	16.97	82.1	94.1	94.1	115	725
AL20NE 24x24	24	7.87	3	7.87	2.28	21.77	32.68	23.62	30.31	25.47	42.9	49.4	49.4	79	584
AL20NE 26x24	26	7.87	3	7.87	2.28	21.77	34.84	23.62	32.32	25.47	45.1	51.8	51.8	84	612
AL20NE 30x24	30	7.87	3	7.87	2.28	21.77	39.13	23.62	36.30	25.47	49.4	56.6	56.6	95	665
AL20NE 32x24	32	7.87	3	7.87	2.28	21.77	41.30	23.62	38.31	25.47	51.5	59.2	59.2	100	694
AL20NE 36x24	36	7.87	3	7.87	2.28	21.77	45.63	23.62	42.32	25.47	55.9	64.5	64.5	110	755
AL20NE 40x24	40	7.87	3	7.87	2.28	21.77	49.92	23.62	46.30	25.47	60.2	68.8	68.8	120	801
AL20NE 42x24	42	7.87	3	7.87	2.28	21.77	52.09	23.62	48.31	25.47	62.3	71.2	71.2	125	828
AL20NE 48x24	48	7.87	3	7.87	2.28	21.77	58.58	23.62	54.33	25.47	68.8	79.3	79.3	141	913
AL20NE 54x24	54	7.87	3	7.87	2.28	21.77	65.04	23.62	60.31	25.47	75.7	86.8	86.8	157	913
AL20NE 60x24	60	7.87	3	7.87	2.28	21.77	71.50	23.62	66.30	25.47	82.1	94.1	94.1	173	1079
AL20NE 32x31	32	7.87	4	7.87	2.28	21.77	41.30	31.50	38.31	33.98	51.5	59.2	59.2	135	921

The technical data shown are subject to change without notice.

AL20NE

Vulcanizers for Rubber Conveyor Belts > Portable presses > Water-cooled

7 Bar (100PSI)	Belt	Z	Set of beams	G1	GP	G3	A	B	C	H	L	Bottom beam weight	Top beam weight	Platen weight	Total weight
Model	in	in		in	in	in	in	in	in	in	in	Lb	Lb	Lb	Lb
AL20NE 36x31	36	7.87	4	7.87	2.28	21.77	45.63	31.50	42.32	33.98	55.9	64.5	64.5	150	1000
AL20NE 40x31	40	7.87	4	7.87	2.28	21.77	49.92	31.50	46.30	33.98	60.2	68.8	68.8	163	1066
AL20NE 42x31	42	7.87	4	7.87	2.28	21.77	52.09	31.50	48.31	33.98	62.3	71.2	71.2	170	1103
AL20NE 48x31	48	7.87	4	7.87	2.28	21.77	58.58	31.50	54.33	33.98	68.8	79.3	79.3	178	1120
AL20NE 54x31	54	7.87	4	7.87	2.28	21.77	65.04	31.50	60.31	33.98	75.7	86.8	86.8	213	1331
AL20NE 60x31	60	7.87	4	7.87	2.28	21.77	71.50	31.50	66.30	33.98	82.1	94.1	94.1	234	1440
AL20NE 36x39	36	7.87	5	7.87	2.28	21.77	45.63	39.37	42.32	42.48	55.9	64.5	64.5	184	1242
AL20NE 40x39	40	7.87	5	7.87	2.28	21.77	49.92	39.37	46.30	42.48	60.2	68.8	68.8	200	1322
AL20NE 42x39	42	7.87	5	7.87	2.28	21.77	52.09	39.37	48.31	42.48	62.3	71.2	71.2	211	1376
AL20NE 48x39	48	7.87	5	7.87	2.28	21.77	58.58	39.37	54.33	42.48	68.8	79.3	79.3	235	1504
AL20NE 54x39	54	7.87	5	7.87	2.28	21.77	65.04	39.37	60.31	42.48	75.7	86.8	86.8	264	1654
AL20NE 60x39	60	7.87	5	7.87	2.28	21.77	71.50	39.37	66.30	42.48	82.1	94.1	94.1	290	1791
AL20NE 48x47	48	7.87	6	7.87	2.28	21.77	58.58	47.24	54.33	50.94	68.8	79.3	79.3	308	1860
AL20NE 54x47	54	7.87	6	7.87	2.28	21.77	65.04	47.24	60.31	50.94	75.7	86.8	86.8	343	2034
AL20NE 60x47	60	7.87	6	7.87	2.28	21.77	71.50	47.24	66.30	50.94	82.1	94.1	94.1	376	2200

14 Bar (200PSI)	Belt	Z	Set of beams	G1	GP	G3	A	B	C	H	L	Bottom beam weight	Top beam weight	Platen weight	Total weight
Model	in	in		in	in	in	in	in	in	in	in	Lb	Lb	Lb	Lb
AL20NE 24x16	24	7.87	2	7.87	2.28	21.77	32.68	15.75	30.31	16.97	42.9	49.4	49.4	55	401
AL20NE 26x16	26	7.87	2	7.87	2.28	21.77	34.84	15.75	32.32	16.97	45.1	51.8	51.8	58	417
AL20NE 30x16	30	7.87	2	7.87	2.28	21.77	39.13	15.75	36.30	16.97	49.4	56.6	56.6	65	454
AL20NE 32x16	32	7.87	2	7.87	2.28	21.77	41.30	15.75	38.31	16.97	51.5	59.2	59.2	68	472
AL20NE 36x16	36	7.87	2	7.87	2.28	21.77	45.63	15.75	42.32	16.97	55.9	64.5	64.5	75	209
AL20NE 40x16	40	7.87	2	7.87	2.28	21.77	49.92	15.75	46.30	16.97	60.2	68.5	68.5	80	541
AL20NE 42x16	42	7.87	2	7.87	2.28	21.77	52.09	15.75	48.31	16.97	62.3	71.2	71.2	85	561
AL20NE 48x16	48	7.87	2	7.87	2.28	21.77	58.58	15.75	54.33	16.97	68.8	79.3	79.3	95	617
AL20NE 54x16	54	7.87	2	10.63	2.28	27.28	65.04	15.75	60.31	16.97	75.7	107.8	107.8	105	773
AL20NE 60x16	60	7.87	2	10.63	2.28	27.28	71.50	15.75	66.30	16.97	82.1	116.6	116.6	117	836
AL20NE 24x24	24	7.87	3	7.87	2.28	21.77	32.68	23.62	30.31	25.47	42.9	49.4	49.4	79	584
AL20NE 26x24	26	7.87	3	7.87	2.28	21.77	34.84	23.62	32.32	25.47	45.1	51.8	51.8	84	612
AL20NE 30x24	30	7.87	3	7.87	2.28	21.77	39.13	23.62	36.30	25.47	49.4	56.6	56.6	95	665
AL20NE 32x24	32	7.87	3	7.87	2.28	21.77	41.30	23.62	38.31	25.47	51.5	59.2	59.2	100	694
AL20NE 36x24	36	7.87	3	7.87	2.28	21.77	45.63	23.62	42.32	25.47	55.9	64.5	64.5	110	755
AL20NE 40x24	40	7.87	3	7.87	2.28	21.77	49.92	23.62	46.30	25.47	60.2	68.8	68.8	120	801
AL20NE 42x24	42	7.87	3	7.87	2.28	21.77	52.09	23.62	48.31	25.47	62.3	71.2	71.2	125	828
AL20NE 48x24	48	7.87	3	7.87	2.28	21.77	58.58	23.62	54.33	25.47	68.8	79.3	79.3	141	913
AL20NE 54x24	54	7.87	3	10.63	2.28	27.28	65.04	23.62	60.31	25.47	75.7	107.8	107.8	156	1148
AL20NE 32x31	32	7.87	4	7.87	2.28	21.77	41.30	31.50	38.31	33.98	51.5	59.02	59.02	135	921
AL20NE 60x24	60	7.87	3	10.63	2.28	27.28	71.50	23.62	66.30	25.47	82.1	116.6	116.6	174	1243
AL20NE 36x31	36	7.87	4	7.87	2.28	21.77	45.63	31.50	42.32	33.98	55.9	64.5	64.5	150	1000

AL20NE

Vulcanizers for Rubber Conveyor Belts > Portable presses > Water-cooled

14 Bar (200PSI)	Belt	Z	Set of beams	G1	GP	G3	A	B	C	H	L	Bottom beam weight	Top beam weight	Platen weight	Total weight
Model	in	in		in	in	in	in	in	in	in	in	Lb	Lb	Lb	Lb
AL20NE 40x31	40	7,87	4	7,87	2,28	21,77	49,92	31,50	46,30	33,98	60,2	68,8	68,8	163	1066
AL20NE 42x31	42	7,87	4	7,87	2,28	21,77	52,09	31,50	48,31	33,98	62,3	71,2	71,2	178	1120
AL20NE 48x31	48	7,87	4	7,87	2,28	21,77	58,58	31,50	54,33	33,98	68,8	79,3	79,3	191	1217
AL20NE 54x31	54	7,87	4	10,63	2,28	27,28	65,04	31,50	60,31	33,98	75,7	107,8	107,8	213	1535
AL20NE 60x31	60	7,87	4	10,63	2,28	27,28	71,50	31,50	66,30	33,98	82,1	116,6	116,6	235	1658
AL20NE 36x39	36	7,87	5	7,87	2,28	21,77	45,63	39,37	42,32	42,48	55,9	64,5	64,5	184	1242
AL20NE 40x39	40	7,87	5	7,87	2,28	21,77	49,92	39,37	46,30	42,48	60,2	68,8	68,8	200	1322
AL20NE 42x39	42	7,87	5	7,87	2,28	21,77	52,09	39,37	48,31	42,48	62,3	71,2	71,2	211	914
AL20NE 48x39	48	7,87	5	7,87	2,28	21,77	58,58	39,37	54,33	42,48	68,8	79,3	79,3	235	1504
AL20NE 54x39	54	7,87	5	10,63	2,28	27,28	65,04	39,37	60,31	42,48	75,7	107,8	107,8	264	1908
AL20NE 60x39	60	7,87	5	10,63	2,28	27,28	71,50	39,37	66,30	42,48	82,1	116,6	116,6	290	2060
AL20NE 48x47	48	7,87	6	7,87	2,28	21,77	58,58	47,24	54,33	50,94	68,8	79,3	79,3	308	1860
AL20NE 54x47	54	7,87	6	10,63	2,28	27,28	65,04	47,24	60,31	50,94	75,7	107,8	107,8	342	2336
AL20NE 60x47	60	7,87	6	10,63	2,28	27,28	71,50	47,24	66,30	50,94	82,1	116,6	116,6	376	2523
AL20NE 60x55	60	7,87	7	10,63	2,28	27,28	71,50	55,12	66,30	59,45	82,1	116,6	116,6	439	2940

The technical data shown are subject to change without notice.